



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 1/69	A1	(11) International Publication Number: WO 95/34140 (43) International Publication Date: 14 December 1995 (14.12.95)
---	-----------	---

(21) International Application Number: PCT/US95/04307

(22) International Filing Date: 10 April 1995 (10.04.95)

(30) Priority Data:
08/253,895 3 June 1994 (03.06.94) US

(71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).


(72) Inventors: KOTZIN, Michael, D.; 321 Fox Hill Drive, Buffalo Grove, IL 60089 (US). MEIDAN, Reuven; 30 Zalman Shneiro Street, Ramat Hasharon (IL).

(74) Agents: HALLING, Dale, B. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(81) Designated States: BR, CN, JP, KR, MX, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: METHOD AND APPARATUS FOR CANCELLING INTERFERENCE IN SIGNALS HAVING UNDERGONE MULTIPATH

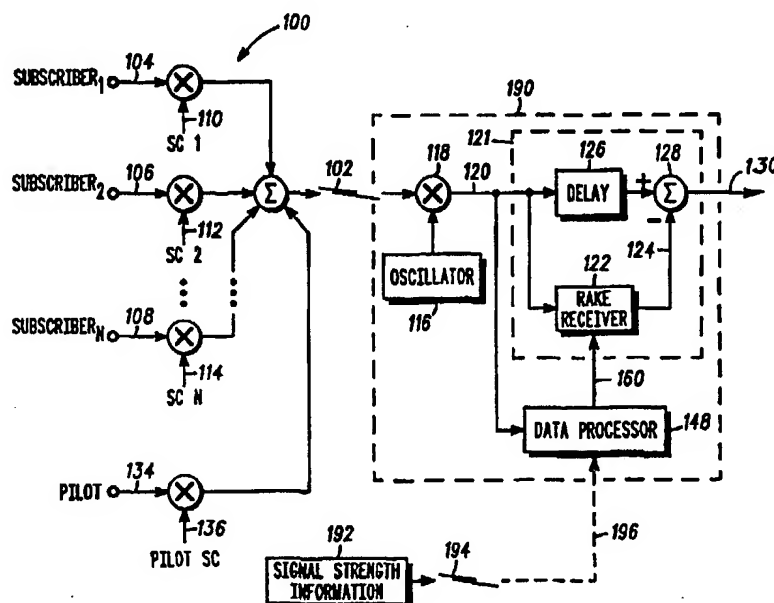

(57) Abstract

A receiver unit (121) cancels interference in a composite received signal (102) by synthesizing a replica of the composite received signal which accounts for multipath effects (echoes) of the composite received signal. The receiver unit (121) is comprised of a RAKE receiver (122), which provides correlation peaks of the various multipath echoes. The correlation peaks are characterized by time delays and respective amplitudes and phases of the various multipath echoes. By generating a cancellation signal (124) which utilizes the correlation peaks of each multipath echo, a signal (130) more representative of the actual composite received signal is utilized to improve the degree of interference cancellation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

**METHOD AND APPARATUS FOR
CANCELLING INTERFERENCE IN SIGNALS
HAVING UNDERGONE MULTIPATH**

5

Related Invention

Reference is made to U.S. Patent Application No. 08/253,454
10 filed June 3, 1994, "Method and Apparatus for Subscriber Power
Level Adjustment in a Communication System" in behalf of
Kotzin et al., filed on the same date herewith, containing related
subject matter and assigned to the assignee of the present
invention.

15

Field of the Invention

The present invention generally relates to cancelling
20 interference in signals, and more particularly to a method and
apparatus for cancelling interference in signals having undergone
multipath.

25

Background of the Invention

In a communication system such as a direct sequence
spread-spectrum code division multiplex system (DS-CDMA), the
uplink signal (the signal from a subscriber to a base-station)
30 comprises a multiplicity of overlapping coded signals from
individual subscribers. Each of these signals occupies the same
radio frequency (RF) carrier simultaneously and are
distinguishable only by their specific encoding. The uplink signal
is received at a base-station receiver as a composite received signal.

In conventional DS-CDMA systems, the base-station receiver decodes each subscriber separately by applying each respective subscribers' code to the composite received signal. Each individual subscriber's signal is thereby "despread" from the composite received signal. Due to the nature of the family of codes utilized, the other subscriber's signals remain in a spread form and act only to degrade the recovered signal as uncorrelated interference. This allows the decoding of user data bits for a particular subscriber.

10 Prior art techniques of interference cancellation are known which act to reduce even the uncorrelated interference. This permits an increase in the sensitivity and or capacity of the multi-user system. The most common technique is to synthesize a replica of a particular subscriber's received signal, after it has been properly decoded, and utilize the synthesized replica to cancel interference (by subtraction) in the received signal. The synthesized replica may be of the spread or despread forms of the particular subscriber's received signal.

20 In a land mobile environment, received signals from subscribers undergo multipath. In other words, a transmitted signal undergoes multiple reflections before it is received at a base-station, and these reflections cause "echoes" of the transmitted signal to be simultaneously received. These echoes are generally of different amplitudes and different delays, and therefore the signal received from each subscriber in actuality consists of a multiplicity of signals (the actual signal and its echoes), each having a different delay and amplitude. It is this multipath that provides a significant contribution to the interference that the received signal experiences.

30 Because of the multipath, interference cancellation techniques are deficient in that synthesis of the replica of a particular subscriber's received signal since it does not take into consideration the multipath nature (i.e., the echoes) of the

received signal. Therefore, a need exists for improved interference cancellation which accounts for multipath of the received signals.

5

Brief Description of the Drawings

FIG. 1 generally depicts, in block diagram form, a receiver unit which may beneficially implement interference cancellation in accordance with the invention.

10

FIG. 2 generally depicts, in block diagram form, a cascade of receiver units which implement interference cancellation in accordance with the invention.

15

Detailed Description of a Preferred Embodiment

A receiver unit cancels interference in a composite received signal by synthesizing a replica of the composite received signal which accounts for multipath effects (echoes) of the composite received signal. The receiver unit is comprised of a RAKE receiver, which identifies correlation peaks of the various multipath echoes. The correlation peaks are characterized by time delays and respective amplitudes and phases of the various multipath echoes. By generating a cancellation signal which utilizes the correlation peaks of each multipath echo, a signal more representative of the actual composite received signal is utilized to improve the degree of interference cancellation.

To perform interference cancellation in a signal having undergone multipath in accordance with the invention, a receiver receives the signal. In the preferred embodiment, this received signal having undergone multipath is a composite of a group of subscribers who occupy the same RF carrier (i.e., a composite received signal). Next, a cancellation source is generated based on the signal's multipath. In the preferred embodiment, the

cancellation source is an analog cancellation signal, but one of ordinary skill in the art will appreciate that alternate embodiments may implement a cancellation source in digital form. Finally, that cancellation source is utilized to help cancel
5 the interference within the composite received signal. Cancellation is effected by summing the analog cancellation signal with the signal having undergone multipath (i.e., the composite received signal).

In U.S. Patent "Method and Apparatus for Cancelling
10 Spread-Spectrum Noise" by Stilwell, et. al., U.S. Patent 5,235,612, assigned to the assignee of the present invention, and incorporated herein by reference, a spread spectrum noise canceller is described. In one embodiment of the interference canceller, a technique for decoding a single subscriber's signal using the conventional DS-
15 CDMA despread operation is provided. By properly decoding a subscriber's signal, it is possible to effectively eliminate this subscriber's signal from the composite received signal. The decoding of a second subscriber's signal with greater accuracy is thereby made possible using the "subsequent" composite received
20 signal (i.e., after interference cancellation) without the contribution of the first subscriber. This process can be applied iteratively to all user signals.

FIG. 1 generally depicts a receiver unit 121 which may beneficially implement interference cancellation in accordance
25 with the invention. As depicted in FIG. 1, only a single receiver (for receiving only SUBSCRIBER₁ out of SUBSCRIBER_N) is depicted for purposes of clarity. Continuing, a composite received signal 102 is comprised of user information (depicted DATA 1, 2, . . . N) for N subscribers. As previously stated, composite received
30 signal 102 has undergone multipath, and as a result composite received signal 102 is represented by various echoes. Continuing, composite received signal 102 is downconverted by oscillator 116 and input into receiver unit 121. The signal is split for input into delay 126 and RAKE receiver (means for receiving and generating)

122. As is well known in the art, RAKE receiver 122 provides multipath characteristics which arise from the correlation peaks of the various echoes. For a background on utilizing RAKE receivers in communication systems, reference is made to John G. Proakis,
5 *Digital Communications*, Second Edition, U.S.A., 1989 at pages 728-739. Continuing, these multipath characteristics include, but are not limited to, time delays and respective amplitudes and phases between correlation peaks. Consequently, utilizing composite received signal's multipath, RAKE receiver 122 is capable of
10 generating a replica of composite received signal 102, which is utilized as a cancellation source. In the preferred embodiment, the cancellation source is in the form of analog cancellation signal 124. Cancellation source 124 is then summed, via a summing node (means for cancelling) 128, with composite received signal 102 so
15 that any interference contributed by SUBSCRIBER₁ is substantially eliminated. Resulting signal 130 represents composite received signal 102 "clean" of any interference contributed by SUBSCRIBER₁.

This technique can be advantageously utilized in a cascade
20 of receiver units. FIG. 2 generally depicts a cascade of receiver units 221, 231, 241 which implement interference cancellation in accordance with the invention. The operation of each receiver unit 221, 231, 241 is identical to the description of unit 121 with reference to FIG. 1, except that RAKE receivers 222, 232, 242 are
25 each dedicated to decoding information of particular subscribers SUBSCRIBER₁, SUBSCRIBER₂, SUBSCRIBER_N. As stated previously, resulting signal 230 is input into receiver unit 231 "clean" of any interference contributed by SUBSCRIBER₁, and so on.

30 A point to make about multipath is that it tends to be relatively slow. Therefore, moderately long term averaging is possible to improve the estimation of the existence of a particular multipath echo. Also, for the downlink, it is possible to estimate multipath of a transmitted signal using the pilot generally

associated with interfering signals. This is typically transmitted at a much higher level and with less modulation.

While the preferred embodiment of a RAKE receiver has been shown, one of ordinary skill in the art will appreciate that other receivers may be suitably adapted for similar implementation. For example, a receiver which utilizes a
5 maximum likelihood sequence estimation (MLSE) equalizer could be beneficially employed to yield similar results.

While the invention has been particularly shown and described with reference to a particular embodiment, it will be understood by those skilled in the art that various changes in
10 form and details may be made therein without departing from the spirit and scope of the invention.

What we claim is:

Claims

1. A method of cancelling interference in a signal having undergone multipath, the method comprising the steps of:
5 receiving the signal having undergone multipath;
 generating a cancellation source based on the signal's multipath; and
 utilizing said cancellation source to help cancel said
10 interference.

2. The method of claim 1 wherein said step of receiving is performed by a RAKE receiver.
3. The method of claim 1 wherein said step of receiving is performed by a receiver incorporating a maximum likelihood sequence estimator (MLSE) equalizer.
4. The method of claim 1 wherein said step of generating a cancellation source further comprises the step of generating a cancellation signal utilizing the signal's multipath.
5. The method of claim 4 wherein said step of utilizing said cancellation source to help cancel said interference further comprises the step of summing said cancellation signal with the signal having undergone multipath.

6. An apparatus for cancelling interference in a signal having undergone multipath, the apparatus comprising:

5 means for receiving the signal having undergone multipath and generating a cancellation source based on the signal's multipath; and

means for cancelling interference in the signal having undergone multipath utilizing the cancellation source.

10 7. The apparatus of claim 6 wherein said means for receiving further comprises a RAKE receiver.


8. The apparatus of claim 6 wherein said means for receiving further comprises a receiver incorporating a maximum likelihood
15 sequence estimator (MLSE) equalizer.

9. The apparatus of claim 6 wherein said means for generating a cancellation source further comprises means for generating a cancellation signal utilizing the signal's multipath.
20

10. The apparatus of claim 6 wherein said means for cancelling further comprises means for summing said cancellation source with the signal having undergone multipath.


1/2

FIG. 1

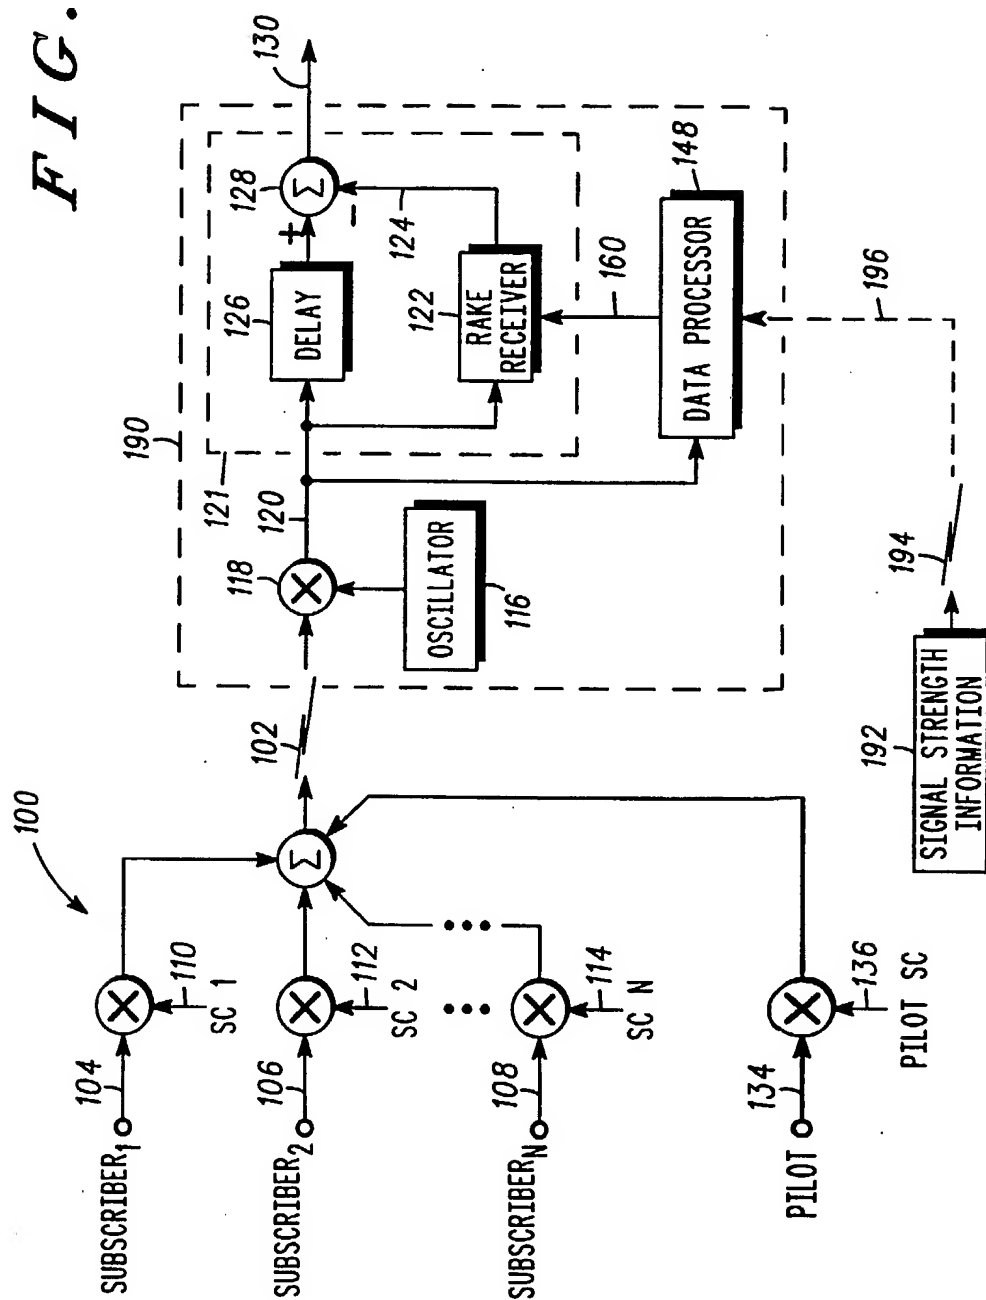

2 / 2

FIG. 2

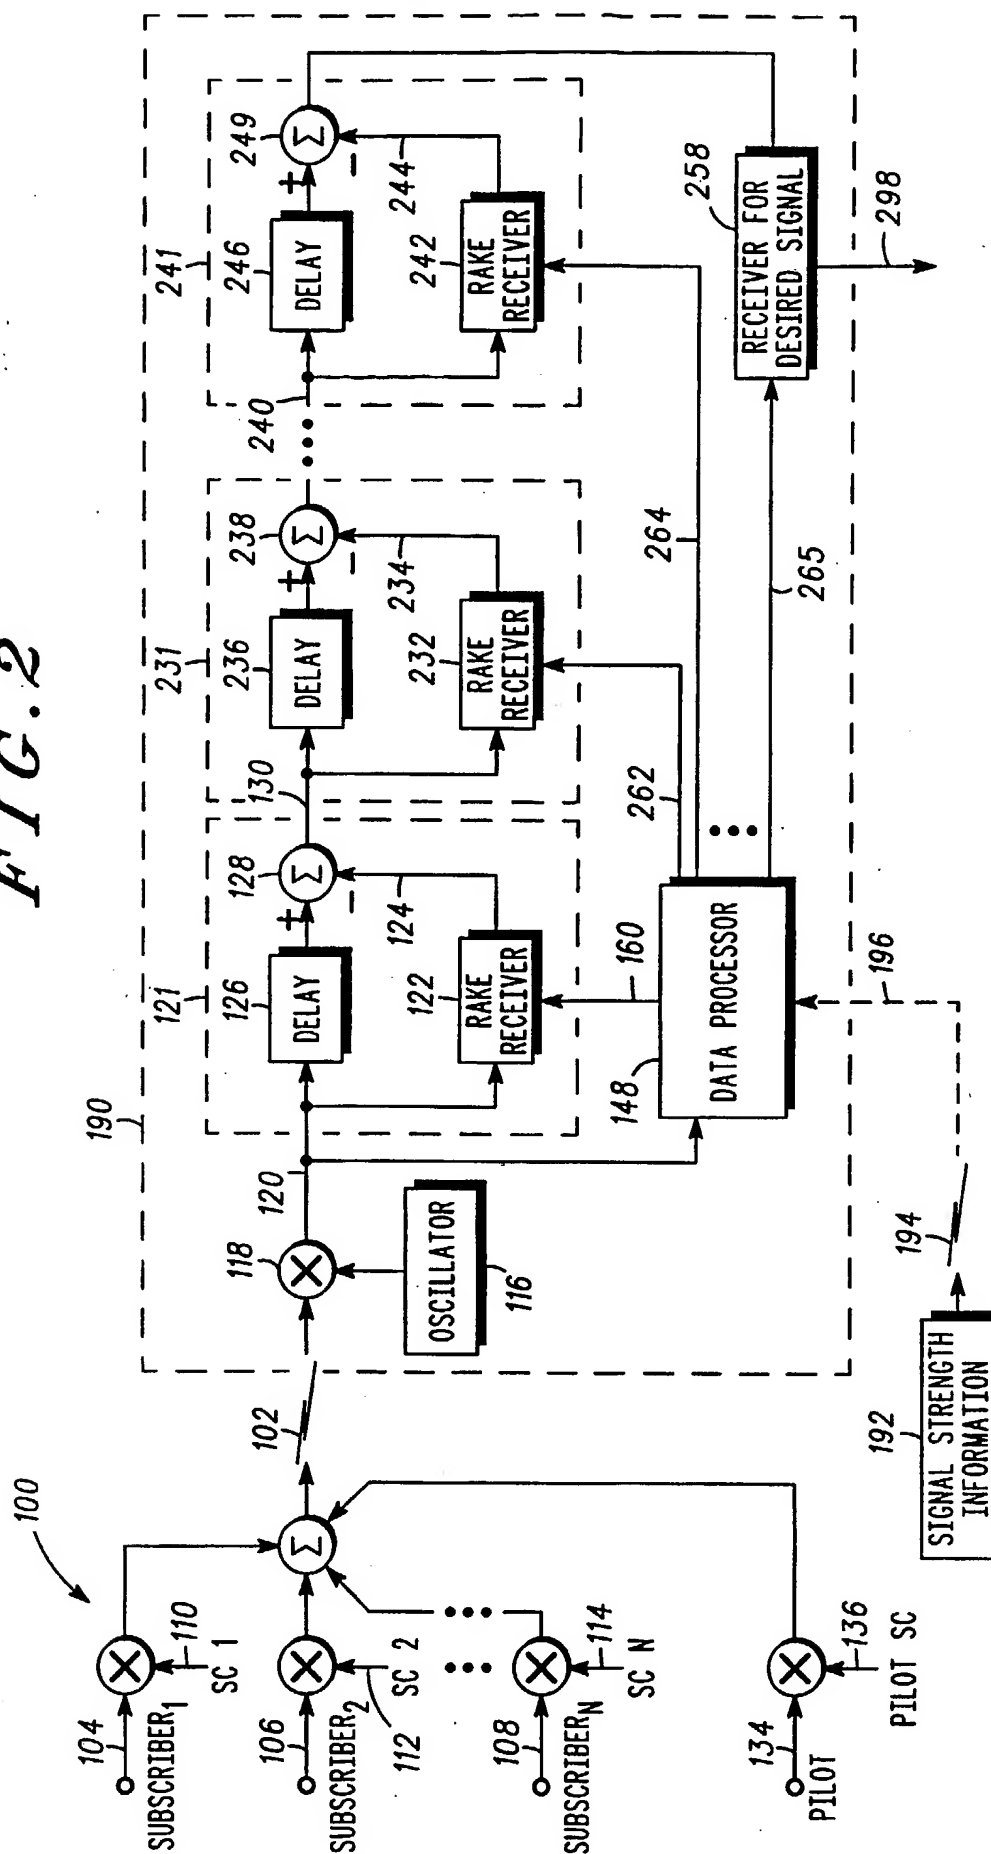

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/04307

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04B 1/69 =

US CL : 375/200

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/200-210, 229-235; 380/34; 455/63, 65, 296, 303

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 2,982,853 (PRICE ET AL) 02 May 1961, see entire document.	1,4,5,6,9, 10
X	US, A, 3,662,108 (FLANAGAN) 09 May 1972, see entire document.	1,4,5,6,9, 10
X	US, A, 4,266,296 (ISHIGAKI) 05 May 1981, see entire document.	1,4,5,6,9, 10
X	US, A, 4,349,915 (COSTAS) 14 September 1982, see entire document.	1,4,5,6,9, 10
X	US, A, 4,457,007 (GUTLEBER) 26 June 1984, see entire document.	1,4,5,6,9, 10
X	US, A, 4,519,084 (LANGSETH) 21 May 1985, see entire document.	1,4,5,6,9, 10

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
09 MAY 1995

Date of mailing of the international search report
14 JUL 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

BERNARR GREGORY

Facsimile No. (703) 305-3230

Telephone No. (703) 308-0479

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/04307

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,590,615 (OHTAKI ET AL) 20 May 1986, see entire document.	1,4,5,6,9, 10
X	US, A, 4,669,091 (NOSSEN) 26 May 1987, see entire document.	1,4,5,6,9, 10
X	US, A, 4,672,638 (TAGUCHI ET AL) 09 June 1987, see entire document.	1,4,5,6,9, 10
X	US, A, 4,873,683 (BORTH ET AL) 10 October 1989, see entire document.	1,4,5,6,9, 10